


## AMENDMENTS TO THE CLAIMS

1 to 6. (Cancelled)

7. (Currently Amended) A process for preparing a pressure sensitive adhesive having enhanced resistance to water-whitening comprising the steps of:

- (a) forming a mixture in water of
  - (i) an initial amount of a polymerization initiator which produces radicals by a thermal decomposition to form a mixture and optional further surfactant;
  - (ii) a water-dispersible polymerizable surfactant selected from ethoxylated alkyl phenol sulfate surfactants,
- (b) forming a polymerizable aqueous pre-emulsion comprising
  - (i) a hydrophobic monomer mixture comprising at least one monomer selected from the group consisting of: alkyl (meth)acrylate ester of an C<sub>1-4</sub> alcohol and 2-ethyl hexyl acrylate; and up to about 30% by weight of the mixture of at least one styrenic monomer,
  - (ii) at least about 1% of the total weight of (i) to (iii) of one or more hydrophilic monomer(s),
  - (iii) at least about 5% of the total weight of (i) to (iii) of at least one partially hydrophilic monomer(s) selected from N-vinyl pyrrolidone; alkyl (meth)acrylate esters of methanol or ethanol; or mixtures thereof,the pre-emulsion further comprising the surfactant;
- (c) contacting ~~a portion of~~ the pre-emulsion formed from step (b) with the water mixture formed from step (a);
- (d) continuously adding further of said pre-emulsion formed from step (b) to said mixture formed from step (c) to polymerize said pre-emulsion to form a latex emulsion, and optionally adding further polymerization initiator during the polymerization of said pre-emulsion; and
- (e) optionally adjusting the pH of said latex emulsion with a suitable base to a pH of about 6.5 to about 9.

8. (Currently Amended) A process as claimed in claim 7, in which (a)(ii) the polymerizable surfactant is that available commercially from Hitachi Chemicals under the trade name Hitanol BC 2020 (a 20% by weight aqueous solution of the compound the polymerizable surfactant is the compound[[.]]])

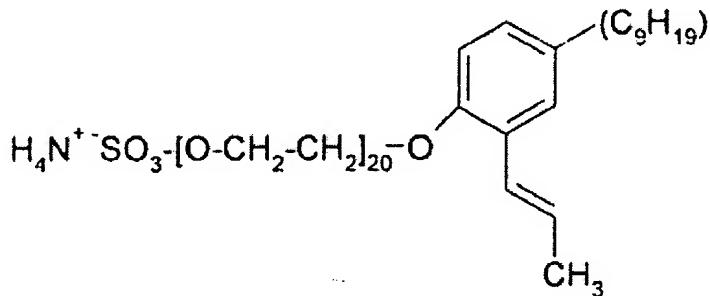

9. (Currently Amended) A process as claimed in claim 8, in which the monomers in the pre-emulsion consists essentially of:

- (b)(i) the hydrophobic monomers: 2-ethyl hexyl acrylate [[()EHA[()]]], and alpha methyl styrene [[()MSTY[()]]],
- (b)(ii) the hydrophilic monomers: acrylic acid [[()AA[()]]] and methacrylic acid [[()MAA[()]]], and
- (b)(iii) the partially hydrophilic monomer: methyl acrylate [[()MA[()]]].

10. (Currently Amended) A process as claimed in claim 9, in which (a)(i) the thermal polymerization initiator [[()PH[()]]] is potassium persulfate.

11. (Previously Presented) An adhesive composition obtained by a process as claimed in any of claims 7 to 10.

12. (Previously Presented) A label facestock comprising a pressure sensitive adhesive as claimed in claim 11.

13. (Previously Presented) An article labeled using a label facestock as claimed in claim 12.

14. **(Previously Presented)** A method for labeling an article comprising the steps of  
(a) dispensing a label from a label facestock as claimed in claim 12, and  
(b) adhering the dispensed label onto the article.

15. **(Previously Presented)** A labeled article obtained by a method as described in claim 14.